



Fan heater



Functional description

The Heating Group International FAN heater type FH is used for heating up big spaces, such as factories, construction sites, stables, ships, garages and barns.

The applications amongst others are climate control and anti condensation. The Heating Group International FH heater is a powerful firm heater, but yet also a small heater. With a protection rate of IP54 it can, without any concern, be used at industrial sites. But the design of the heater makes it suitable for public spaces as well. The Heating Group International FH heater is available in power ratings from 2000W to 24000W.

In big spaces the air movement takes care of the equal warming. Every fan heater is delivered with a built-in thermostat which makes sure there will not be any energy spilling. The heater also has a built-in five-position switch which can arrange the amount of air and heat.

Construction




Through his small weight the Heating Group International FH fan heater is easy to carry. Because of this the heaters can be used for both a permanent installation like in warehouses or garages, but also for portable use on construction sites for example construction sites.

Because of the electronic galvanized and powder coated (RAL 5003 grain structure) casing, the heater is completely corrosion resistant and extremely robust. The heating elements are made of RVS304. The Heater is provided with a wide metal tube frame, which insures a stable position. Besides that it protects the heater during transport. Trough the waterproof casing (IP54), the heater can be used in dry as well as in humid environments. The heaters are maintenance free. It could be that after a longer operating time it needs to be blown clean with compressed air.



Type table

Type	Power (Watt)	Voltage (Volt)	Width (mm)	Height (mm)	Depth (mm)
FHM 2	2000	230	385	455	350
FHM 3	3000	230	385	455	350
FH 3	3000	3x400	385	455	350
FH 6	6000	3x400	385	455	350
FH 9	9000	3x400	385	455	350
FH 12	12000	3x400	430	513	462
FH 15	15000	3x400	430	513	462
FH 18	18000	3x400	430	513	462
FH 21	21000	3x400	430	513	462
FH 24	24000	3x400	430	513	462

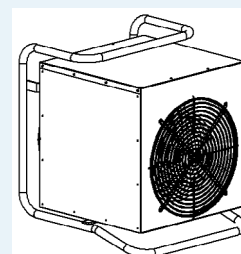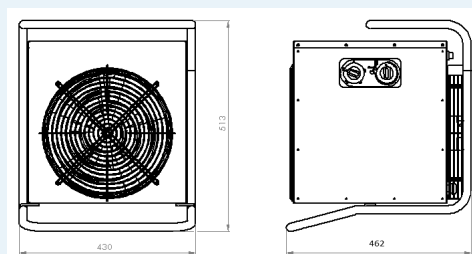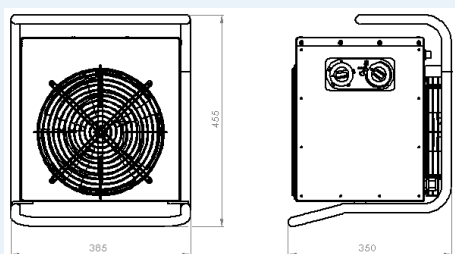

Accessoires / options

Wall mounting brackets for a permanent installation
 Control with an external thermostat ore control cabinet
 Different voltage or power

